

Beautiful Screen with Smooth Operation

19-inch flat panel display

GPD-U64EM-DC2

**NEW
RELEASE**

Compatible with
VESA standard

Sophisticated design

Anti-glare coating and flat bezel design for easy cleaning.

Sleek design with smooth touch operation

Elegant display with PCAP Touch technology supporting up to 10 point multi-touch functions.


Compliant with major safety standards

Facilitate global business expansion with various safety standards such as CCC, CE, FCC, and VCCI.

For operation terminal



Angle adjustable

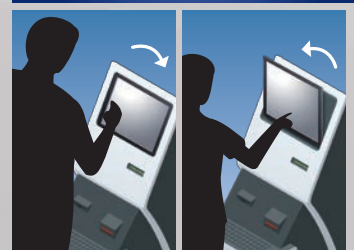

*Angle adjustment by VESA mount

19-inch flat panel display GPD-U64EM-DC2



Ordering model

Model	LCD	Touch Technology
GPD-U64EM-DC2	19-inch SXGA(1280 × 1024)	PCAP

Specifications

Item	Description
Display specifications	Panel type
	19-inch non-glare treatment TN panel
	Resolution (max)
	1280 x 1024
	Contrast ratio
Touch screen specifications	1000:1
	Luminance (Back light type)
	225 nits (PCAP)
	View angle
	H:170°, V:160°
I/O port	Touch screen
	PCAP
	Touch points
	10
Other	Touch screen interface
	USB2.0 (TypeB)
	USB HID class
	USB port
Other	USB2.0 (TypeB) x 1
	USB HID class (for touch panel interface)
	Video port
	VGA (D-SUB15 pin) x 1, DVI x 1
Other	Audio port
	N.A.
	Compatible OS
	Windows10 IoT Enterprise
	Dust-proof, Drip-proof
	Display front side IP65
	Physical dimensions (mm/inch)
	416.0(W) x 344.0(H) x 46.6(D) / 16.38(W) x 13.54(H) x 1.83(D)
	Weight
	4.4kg / 9.7lbs
	VESA
	100 x 100 mm
	Power input
	24VDC±10%, 3 terminals (with covers)
	Power consumption
	20W (Typ.) (24VDC, 0.83A)
	25W (Max.) (24VDC, 1.04A)
	Operating temperature (°C / °F)
	0 to 40°C / 32 to 104°F
	Operating humidity
	20 to 80%RH (No condensation)
	Standard
	VCCI Class B, FCC Class B, CE Marking (EMC Directive Class A, RoHS Directive) *1, CCC

*1 In order to meet CE standards, DVI cable length needs to be 3m (9.84ft) or shorter.

* Power supply unit and cable are not included. Prepare a commercially available product (24VDC, 3 terminals) separately.

Attachment

USB cable for touch screen 1.8m / 70.87inch(A - B type)...1 VGA cable 1.8m / 70.87inch...1

Contec Global Network

U.S.A.

CONTEC AMERICAS INC.
3991 Sarno Road, Melbourne, FL 32934 U.S.A.
Tel. : +1-321-728-0172
e-mail : sales@us.contec.com

THE NETHERLANDS

CONTEC CO., LTD. AMSTERDAM BRANCH
Hogehilweg 18 1101 CD Amsterdam
THE NETHERLANDS
Tel. : +31-20-238-0960

TAIWAN

TAIWAN CONTEC CO., LTD.
9FL, No. 738, Zhongzheng Road,
Zhonghe District, Xinbei 23511 TAIWAN
Tel. : +886-2-8227-8669

KOREA

CONTEC CO., LTD. Korea Liaison Office
19, Cheongmyeong-ro 21beon-gil,
Yeongtong-gu, Suwon-si, Gyeonggi-do,
16705 KOREA

CHINA

CONTEC (SHANGHAI) CO., LTD
Room 1002, Qilai Building, No. 889,
Yishan Road, Xuhui District, Shanghai
200233 CHINA
Tel. : +86-21-5401-2288

INDIA

CONTEC CO., LTD. India Liaison Office
Unit No. DPT-134, First Floor,
DLF Prime Towers, Okhla Phase- 1,
New Delhi -110020, INDIA

SINGAPORE

SINGAPORE CONTEC PTE. LTD.
Blk 4010, Ang Mo Kio Ave. 10 #07-01
Techplace I, 569626 SINGAPORE
Tel. : +65-6459-1667


<https://www.contec.com/>

Headquarters: CONTEC CO., LTD. (Japan)

3-9-31, Himesato, Nishiyodogawa-ku, Osaka 555-0025, Japan
Tel:+81-6-6477-5219 e-mail:intsales@jp.contec.com


202008v1

External dimensions

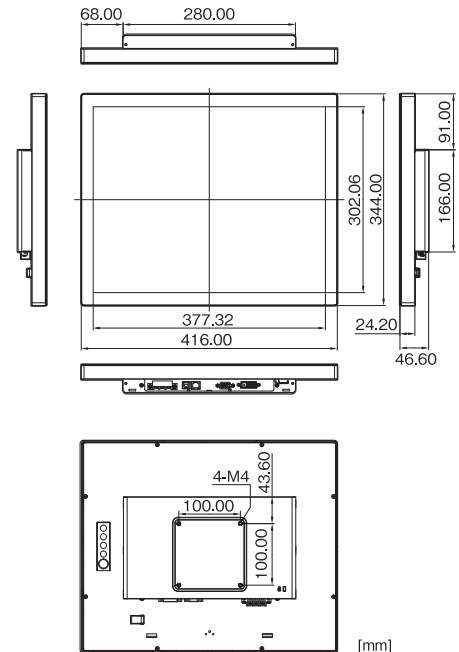

* This product does not have mounting holes for panel mounting. Only VESA mount is available.

Connector part

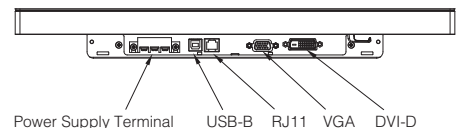

*RJ-11 connector cannot be used.