

Compliant with 20 Different International Safety Standards

Certified Compact PC Ready to Ship around the World

New, global PC series

GPC-700 Series

Intel® Core™ i5

Low-power embedded CPU

4K Output

Three-screen display support
(DisplayPort, HDMI, DVI-I)


Built to Order

Configurable OS, memory, storage,
optical drive, and region-specific AC cable



**The solution to your exporting challenges.
Configure the GPC-700 for use anywhere in the world.**

Japan (VCCI), United States of America (FCC, CSA),
Canada (CSA), Mexico (NOM), Argentina (IRAM),
Europe (CE), Ukraine (Ukr Sepro), Moldova (INSM),
Israel (IEC/Israel 60950), China (CCC), South Korea (KC),
Taiwan (BSMI), Australia and New Zealand (RCM),
Singapore (PSB), South Africa (NRCS LOA),
Cambodia (KS Compliance), Kenya (PVoC),
Nigeria (SONCAP), Serbia (KVALITET), India (BIS)

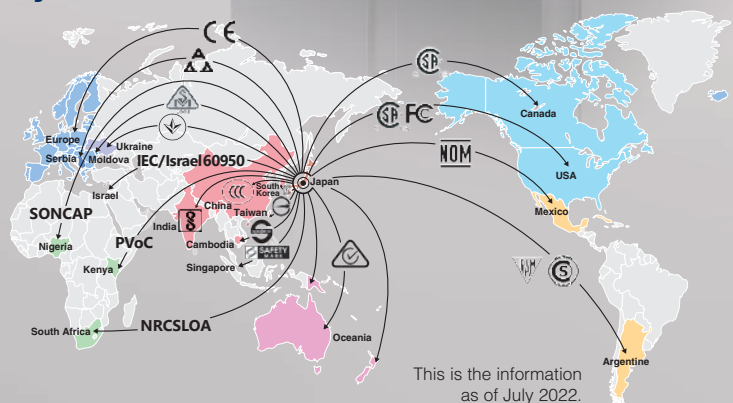



■ Main Specifications

* This product is Built-to-Order. Configurable options like memory, storage, and optical drive are selected at the time of ordering.


Item	Description
CPU	Intel® Core™ i5-6500 3.2 GHz
Memory [Selection]	8 GB (1 x 8 GB)
	16 GB (2 x 8 GB)
Storage [Configurable]	1 x 500 GB HDD
	2 x 500 GB HDD
	2 x 500 GB HDD Software raid (Mirroring) support
	1 x 240 GB SSD
	2 x 240 GB SSD
Optical drive [Selection]	None
	Super multi drive
Display	1 x DisplayPort, 1 x HDMI, 1 x DVI-I
Interface	6 x USB3.1 Gen1 (USB3.0), 2 x USB2.0, 3 x LAN, 1 x RS-232C / 422A / 485
Expansion slot	1 x PCI Express (x16) Low Profile
OS [Selection]	Windows 10 IoT Enterprise LTSB 2016 64-bit (Japanese / English / Chinese / Korean)
	Windows 10 IoT Enterprise 2019 LTSC 64-bit with Microsoft Edge (Chromium) (English / Chinese / Japanese / Korean)
	Windows 10 IoT Enterprise 2019 LTSC 64-bit (Japanese / English / Chinese / Korean)
AC cable [Selection] *2	None
	Japanese model
	Global model *3
Rated input voltage	100 to 240 VAC (50/60 Hz)
Range of input voltage	90 to 264 VAC
Operating temperature (°C / °F)	5 to 40°C / 41 to 104°F
Physical dimensions (mm / inch)	264 (W) x 263 (D) x 112 (H) / 10.39 (W) x 10.35 (D) x 4.41 (H) (No protrusions)

*1 Some configurations are not available. Contact CONTEC or your local distributor for details.

*2 Orders include one Japanese model AC cable and one global model AC cable.

*3 Global Model AC Cable can be selected from "North America, EU, Argentina, Mainland China, Australia/New Zealand, Brazil, South Korea/Russia, South Africa, Israel, Switzerland, United Kingdom, Taiwan."

■ Rear view

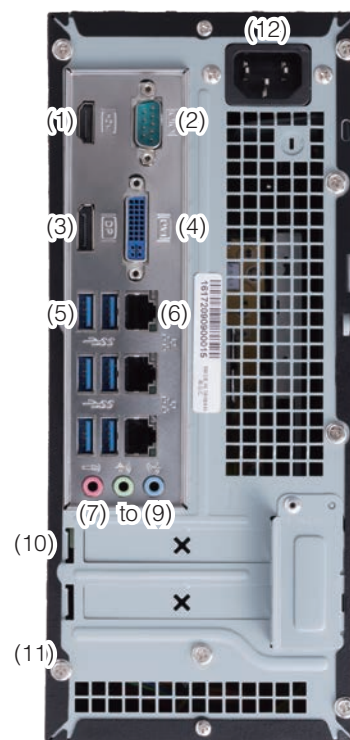

- (1) HDMI
- (2) Serial
- (3) DisplayPort
- (4) DVI-I
- (5) USB3.1 x 6
- (6) LAN x 3
- (7) MIC IN
- (8) LINE OUT
- (9) LINE IN
- (10) PCIe x16 Slot
- (11) Drive
- (12) AC INLET

Contec Global Network

U.S.A.

CONTEC AMERICAS INC.
3991 Sarno Road, Melbourne, FL 32934 U.S.A.
Tel. : +1-321-728-0172
e-mail : sales@us.contec.com

TAIWAN

TAIWAN CONTEC CO., LTD.
9FL, No. 738, Zhongzheng Road,
Zhonghe District, Xinbei 23511 TAIWAN
Tel. : +886-2-8227-8669

CHINA

CONTEC (SHANGHAI) CO., LTD
Room 1002, Qilai Building, No. 889,
Yishan Road, Xuhui District, Shanghai
200233 CHINA
Tel. : +86-21-5401-2288

SINGAPORE

SINGAPORE CONTEC PTE. LTD.
Blk 4010, Ang Mo Kio Ave. 10 #07-01
Techplace I, 569626 SINGAPORE
Tel. : +65-6459-1667

KOREA

CONTEC CO., LTD. KOREA BRANCH
19, Cheongmyeong-ro 21beon-gil,
Yeongtong-gu, Suwon-si, Gyeonggi-do,
16705 KOREA

INDIA

CONTEC CO., LTD. India Liaison Office
Unit No. DPT-134, First Floor,
DLF Prime Towers, Okhla Phase- 1,
New Delhi -110020, INDIA
Tel. : +91-11-40541327

<https://www.contec.com/>

Headquarters: CONTEC CO., LTD. (Japan)

3-9-31, Himesato, Nishiyodogawa-ku, Osaka 555-0025, Japan
Tel: +81-6-6477-5219 e-mail: intsales@jp.contec.com