

CONPROSYS Series
Digital Input/Output , RS-232C Model
CPS-MC341-DS11-111



* Specifications, color and design of the products are subject to change without notice.

Hardware Features

Compact design

Compact design, 188.0(W) x 78.0(D) x 30.5(H), features flexibility in installation.

Adaptable to a temperature range between -20 and +60°C

The product is capable of operating in the temperature between -20 and + 60°C. It can be installed in the various environments.

Ethernet Hub function within

Use the product as Ethernet Hub so that you can connect devices in the daisy-chain.

A powerful running platform without fan

The product contains the ARM® Cortex® -A8 processor (600MHz) and the DDR3 512MB system memory.

Decrease damages by bus isolation and surge protection. (digital input/output)

Electrical isolation between the digital input/output and CPU can block electrical noise flow. Moreover, the surge protection elements are adopted

Capable of adapting a wide-range power (12- 24VDC)

The product is capable of dealing with a wide range of power in the differing environments. Power connector also has a FG terminal.

Easy installation with screws or on DIN rail

This product can be installed on the wall with screws or on DIN rail with simple mounting.

Installation with two pieces of terminal support

The terminal connector can be removed without a screwdriver. Even when a malfunction occurs, this product can be replaced in a short length of time.

Equipped with LED for an operation check

The product has LED for an operation check, which helps you visually confirm the communication status of each interface.

No electrolytic capacitor or primary battery

Neither an electrolytic capacitor, which has a limited life, nor a primary battery is used. The Contec is creating the product with a longer life.

This product is a M2M controller with RS-232C, isolated digital input/output, and LAN interface.

It is equipped with the ARM® Cortex® -A8 processor (600MHz) and the 512MB DDR3-SDRAM system memory. On-board NOR-FLASH is utilized for a booting device.

You can perform all processes on a web browser from the development to the operation. The functions such as Web monitoring of I/O information, alarm processing by I/O information, task divergence enable you to create a Cloud System at low cost and in a short time.

- * The contents in this document are subject to change without notice.
- * Visit the CONTEC website to check the latest details in the document.
- * The information in the data sheets is as of April, 2024.

Software Features

Measurement and upload

This product measures data with an external sensor and uploads them to the Cloud server.

Web monitoring

The product contains a Web server. Even with the PC located remotely, I/O information can be monitored and updated through a Web browser. On the monitoring screen, the standard GUI parts (graphic, slider, button, etc.) can be freely arranged.

All operations including monitoring layout, making relations with I/O information, can be achieved through a Web browser.

Web task script

By combining icons such as arithmetic operations, conditional branching, data outputting, you can set up the executions or its processes like drawing them in the flowchart. All operations can be completed through a Web browser.

Message communication function

With the RS232C or the Ethernet device (TCP/UDP), up to 10 links can be set to send or receive messages.

Message communication can be accomplished from Web task script.

Included Items

Product [CPS-MC341-DS11-111] ...1

Please read the following ...1

3pin Connector (Power) ...1

10pin Connector (Digital)...2

Optional Products

Product Name	Model type	Description
DIN rail mounting power supply	CPS-PWD-15AW12-01	DIN rail mounting power supply 15[w] (Input: 100 - 240VAC, output: 12VDC 1.3 A)
SD card	SD-4GB-A	SD card 4GB
Magnet	CPS-MAG01-4	Magnets for installation (Four Piece Set)

* Visit the Contec website regarding information on the optional products

Specifications

Function specifications

Item		CPS-MC341-DS11-111	
CPU		ARM Cortex-A8 600MHz	
Memory		On Board 512MB DDR3 SDRAM	
ROM		On-Board 32MB NOR Flash for OS	
LAN	Transmission standard	10BASE-T/100BASE-TX	
	The number of channels	2	
	Connector	RJ-45 Connector	
	LED	Speed (Yellow), Link/Act (Green)	
USB	Transmission standard	USB2.0 standard follow	
	The number of channels	1	
	Connector	TYPE-A	
SD card slot	Standard	SD standard follow	
	Connector	SD memory card slot	
	LED	Read/Write (Yellow)	
RS-232C	Baud Rate	300bps - 115.2kbps	
	Isolation/Resistance	Non-isolated	
	The number of channels	1	
	Connector	9-pin D-SUB connector (Male)	
	LED	Transmission (Yellow), Reception (Yellow)	
Digital input	Input type	Opto-coupler isolation input (Compatible with current sink output) (negative logic) *1	
	Isolation/voltage resistance	Opto-coupler /1000V	
	Input ON current	1.6mA or more	
	Input OFF current	0.16mA or less	
	Input resistance	5.6kΩ	
	The number of channels	8	
	LED	DI0 - DI7 (Yellow)	
	Connector	2-piece 3.5mm pitch 10-pin terminal (MCOM, DI0, DI1, DI2, DI3, DI4, DI5, DI6, DI7, PCOM)	
	Applicable wire	AWG28 - 16	
	Built-in power	None *2	
	External power supply	12 - 24VDC (±10%)	
	Digital output	Output type	Open collector output (Current sink type) (negative logic) *1
		Isolation/voltage resistance	Opto-coupler isolation/1000V
Maximum output voltage resistance/current		35V/100mA	
Residual voltage with output ON		0.5V or less (Output current <= 50mA), 1.0V or less (Output current <= 100mA)	
The number of channels		8	
LED		DO0 - DO7 (Yellow)	
Connector		2 pieces 3.5mm pitch 3-pin terminal (MCOM, DO0, DO1, DO2, DO3, DO4, DO5, DO6, DO7, PCOM)	
Applicable wire		AWG28 - 16	
External power supply		12 - 24VDC (±10%)	
LED	Power (Green)/Status 1 (Green)/Status 2 (Red)		
Switch	Reset SW, Shut Down SW		
RTC	RTC built-in (battery not equipped)		
Power supply *3	Rated input voltage	12 - 24VDC	
	Input voltage range	10.8 - 30VDC	
	Power consumption	12V 0.6A (Max), 24V 0.3A (Max)	
	Connector	2-piece 3.5mm pitch 3-pin terminal (V+, V-, FG)	
	Applicable wire	AWG24 - 16	
	Surge protection element	Interactive TVS diode Stand off voltage: ±30V, Peak pulse power: 400W(1msec)	
Physical dimensions (mm)	188.0(W)×78.0(D)×30.5(H) (No projection included)		
Weight	280g		
Installation method	Quick mounting on the 35mm DIN rail, Mounting on the wall using the screws *4		
OS	Linux kernel 3.2		

*1 Data 0 corresponds to High level and Data 1 corresponds to Low level.

*2 To drive the digital circuit, external power is required separately.

*3 Use power cable within 3meters.

*4 Commercial screws are required (fit into φ3.5 hole).

Installation Environment Requirements


Item		CPS-MC341-DS11-111
Operating ambient temperature		-20 - +60°C *5
Operating ambient humidity		10 - 90%RH (No condensation)
Non-operating ambient temperature		-20 - +60°C
Non-operating ambient humidity		10 - 90%RH (No condensation)
Floating dust particles		Not to be excessive
Corrosive gases		None
Line-noise resistance	Line noise	AC Line/±2kV *6 Signal Line / ±1kV(IEC61000-4-4 Level 3, EN61000-4-4 Level 3)
	Static electricity resistance	Touch /±4kV(IEC61000-4-2 Level 2, EN61000-4-2 Level 2) Air / ±8kV(IEC61000-4-2 Level 3, EN61000-4-2 Level 3)
Vibration resistance	Sweep resistance	10 - 57Hz *7 /semi-amplitude vibration 0.15mm, 57 - 150Hz/2.0G 40minutes each in X, Y, and Z directions (JIS C60068-2-6-compliant, IEC60068-2-6-compliant)
	Shock resistance	15G half-sine shock for 11ms in X, Y, and Z directions (JIS C 60068-2-27-compliant, IEC 60068-2-27-compliant)
Grounding	Class D grounding (previous class 3 grounding), SG-FG/ non-conduction	
Standard	VCCI Class A, FCC Class A, RoHS Directive, UKCA, UL CE Marking (EMC Directive Class A, RoHS Directive), UKCA, UL	

*5 If you use the USB with bus power, operate the product at between -20 and +55°C.

*6 When you use the CPS-PWD-15AW12-01 (optional product)


*7 When you use an optional power product: 10-55Hz (See the manual of optional power product for details)

Physical Dimensions

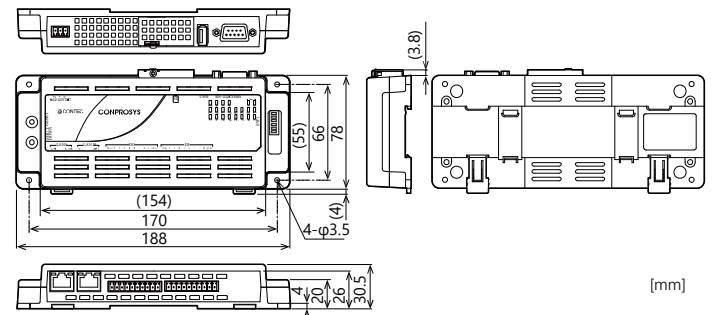

[mm]

Component Name

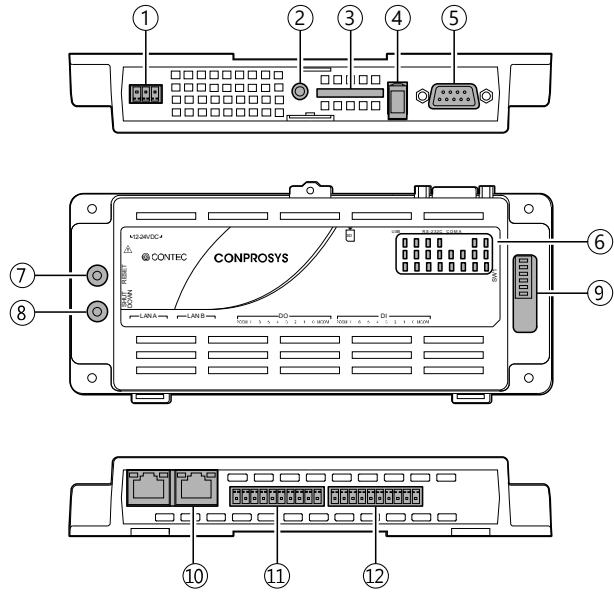

No.	Name	Function
1	Power Connector	This is a connector for power. (Use the 3-pin connector included in the package)
2	Debug Connector	Do not use this.
3	SD Card Slot	This is a slot for inserting SD card to store data.
4	USB Port	This is a TYPE-A USB port.
5	RS-232C Serial Port	This is a RS-232C serial port. (male)
6	LED Indicator	This indicates status of the product.
7	Reset Switch	This resets the product.
8	Shutdown Switch	This shuts down the product.
9	DIP Switch	This is used for system setup.
10	LAN Port	This is a connector for LAN.
11	Digital Output	This is a connector for digital output. (Use the 10-pin connector included in the package)
12	Digital Input	This is a connector for digital input. (Use the 10-pin connector included in the package)