

Ethernet Remote I/O F&eIT N Series
Isolated Digital Input Unit

DI-32LN-FIT



The photograph is DIO-1616LN-FIT.

* Specifications, color and design of the products are subject to change without notice.

This product is an isolated digital input unit of F&eIT remote I/O system that realizes monitoring and control of devices scattered remotely, through PCs connected to Ethernet. Since existing network infrastructure can be used, the system can be built easily by just connecting with LAN cables. It is possible to connect external devices, such as adjacent switches, lamps and LEDs, to perform input of digital signals. Compact design not restricting installation location (188.0(W) x 78.0(D) x 30.5(H)) makes it easy to install the product within the panel or device using DIN rail mounting jigs, or on the floor or wall. Windows driver library is supplied. It is possible to confirm the operations through the diagnosis monitor without any programming. This product has the 32ch of Optocoupler isolated inputs (12 - 24VDC specification). Input section corresponds to both of current sink and current source outputs.

- * The contents in this document are subject to change without notice.
- * Visit the CONTEC website to check the latest details in the document.
- * The information in the data sheets is as of July, 2024.

Features

Optocoupler isolated inputs (for use with current sink output / current source output)

32ch of Optocoupler isolated inputs (for use with current sink output / current source output). Common terminal provided per 8ch, capable of supporting a different external power supply. You can check the digital input by using the LED indicator.

Optocoupler bus isolation

As the controller (PC) side is isolated from the input interfaces by Optocouplers, this product has excellent noise performance.

This product has a digital filter to prevent wrong recognition of input signals from carrying noise or a chattering.

This product has a digital filter to prevent wrong recognition of input signals from carrying noise or a chattering. All input terminals can be added a digital filter, and the setting can be performed by software.

Compact design not restricting installation location (188.0(W) x 78.0(D) x 30.5(H))

Compact design of 188.0(W) x 78.0(D) x 30.5(H) does not require special installation location.

Compatible with a wide range of power supplies : 5 to 24VDC

Compatible with a wide range of power supplies : 5 to 24VDC, and can be used in various environments. An FG terminal is also provided in the power connector. Furthermore, it is possible to screw fit the power connector on to the body to prevent detachment.

Can be used as digital input of Ethernet base remote I/O

As the control (monitoring and control) of digital input is performed via Ethernet, remote control can be easily performed.

Diverse installations such as screw fastening, magnet, DIN rail are possible

Installation on the floor / wall / ceiling is possible by screw fastening, magnet, rubber feet, etc. In addition, DIN rail mounting mechanism is equipped as standard with the product, making it easy to install the product within the panel or the device.

Windows compatible driver libraries are attached.

Using the attached driver library makes it possible to create applications of Window. As the driver library was designed taking into consideration compatibility with the API functions [API-PAC(W32)] of the measurement control and communication interface board, if you have experience in these applications, smooth programming is possible. In addition, a diagnostic program by which the operations of hardware can be checked is provided. In addition, using generic socket functions makes it possible to implement control under OS other than Windows, such as UNIX machine.

Specification

Specifications < 1 / 2 >

Item	Specifications
Input section	
Input format	Optocoupler isolated input (compatible with current sink output and current source output)
Input resistance	4.7kΩ
Input ON current	2.0mA or more
Input OFF current	0.16mA or less
Number of input signal channels	32 channels (8 channels / common)
Response time	Within 1msec
External circuit power supply	12 - 24 VDC (±15%) (2.5 mA / 12V, 5 mA / 24V per channel)
Common section	
Allowable distance of signal extension	Approx. 50m (depending on wiring environment)
Applicable wire	AWG28 - 16
Applicable plug	AK1550 / 10-3.5-GREEN (mfd. by PTR)

Specifications < 2 / 2 >

Item	Specifications
LAN	10/100BASE-TX(IEEE802.3u)
Power voltage	5 - 24VDC±10% supply from 2-piece power input detachable type connector It is recommended that you use F&E series power unit or stabilized power product on the market. Maximum extension between power device and the product : 1.5m
Current consumption (Max.)	5VDC 0.56A, 12VDC 0.24A, 24VDC 0.13A
FG pin	Power supply connector equipped with a FG pin.
Power input connector	2-piece power input detachable type connector with an FG terminal supplied Uses connector : MC1,5/3-GF-3,5 (mfd by Phoenix Contact) The dedicated plug, with screw fastening that can be operated from the side, is supplied as standard Compatible connector : MC1,5/3-STF-3,5 (mfd by Phoenix Contact) Compatible cable : AWG28-16
Physical dimensions (mm)	188.0(W) x 78.0(D) x 30.5(H) (No protrusions)
Weight	220g (Only the unit)
Installation method	One-touch connection to 35mm DIN rails DIN rail mounting mechanism as a standard feature. Mounting to the wall using the screws Mounting to a metal surface using the magnets Mounting to the floor using the rubber feet

Installation Environment Requirements

Item	Requirement description
Operating temperature	0 - 50°C *1
Operating humidity	10 - 90%RH (No condensation)
Floating dust particles	Not to be excessive
Corrosive gases	None
Noise immunity	Line-noise *2 AC line / 2kV, Signal line / 1kV (IEC1000-4-4Level 3, EN61000-4-4Level 3)
	Static electricity resistance Contact discharge / 4kV (IEC1000-4-2Level 2, EN61000-4-2Level 2) Atmospheric discharge / 8kV (IEC1000-4-2Level 3, EN61000-4-2Level 3)
Vibration resistance	Sweep resistance 10 - 57Hz / semi-amplitude 0.15mm, 57 - 150Hz / 2.0G
	40minutes each in X, Y, and Z directions (JIS C60068-2-6-compliant, IEC60068-2-6-compliant)
Impact resistance	15G half-sine shock for 11ms in X, Y, and Z directions (JIS C60068-2-27-compliant, IEC60068-2-27-compliant)
Grounding	Class D grounding (previous class 3 grounding)
Standard	VCCI Class A, FCC Class A, CE Marking (EMC Directive Class A, RoHS Directive), UKCA

*1 When using the attached AC adaptor POA201-10-2, it is 0 - 40°C

*2 When using a POA201-10-2

Support Software

API-CAP(W32)

The API-CAP(W32) is the Windows version driver library software that provides products in the form of Win32 API functions (DLL). Various programming languages such as Visual Basic and Visual C++ can be used to create high-speed application software which maximizes the features of the F&E module. In addition, a diagnostic program, which is useful for operation verification, is also provided. For more details on the supported OS, applicable language and how to download the updated version, please visit the CONTEC's Web site.

Option list


- POA201-10-2 : AC adapter (12VDC 1A)
- POA200-20-2 : AC adapter (5VDC 2A)
- POW-DD10GY : DC-DC power unit
(input : 10 - 30VAC, output : 5VDC 3.0A)

* Check the CONTEC's Web site for more information on these options.


Packing List

- Unit [DI-32LN-FIT] ...1
- Power connector ...1
- I/O connector ...4
- Rubber feet ...4
- Magnet ...2
- Please read the following ...1

Physical Dimensions

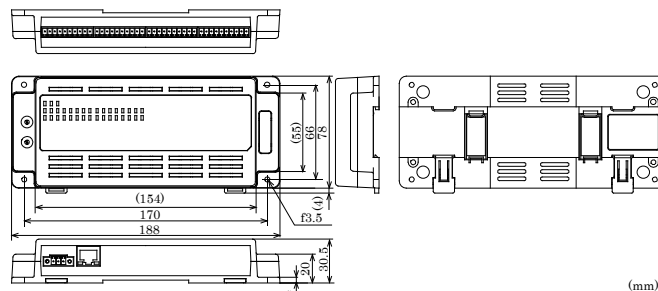


AC Adapter POA201-10-2 (Option)

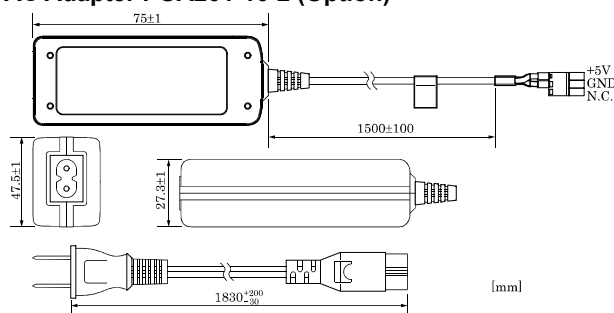

Connecting an Interface Connector

When connecting the unit to an external device, you can use the supplied connector plug. When wiring the unit, strip off approximately 7 mm of the covering for the cable, and insert the bare wire by pressing the orange button on the connector plug. Releasing the orange button after the wire is inserted fixes the cable. Compatible wires are AWG 28 - 16.

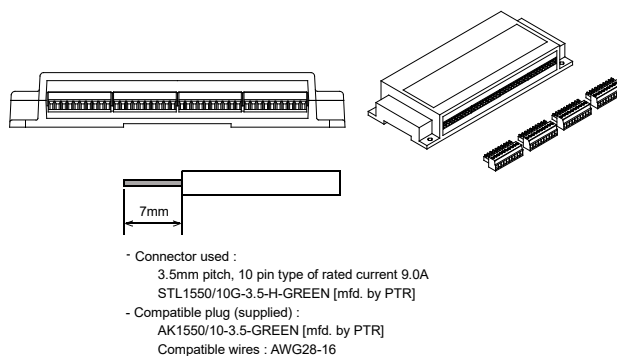


CAUTION
Removing the connector plug by grasping the cable can break the wire.

Signal Layout on the Interface Connector

The unit can be connected to an external device using 10-pin connectors that is provided on the unit face.

Connector : 4



Pin No.	Signal name	Logical bit	Logical port	Contents
0	IN00	0	0	Input
1	IN01	1		
2	IN02	2		
3	IN03	3		
4	IN04	4		
5	IN05	5		
6	IN06	6		
7	IN07	7		
N.C.	N.C.	-	-	Not connected
COM	COM	-	-	Plus / minus common for INPUT0

Pin No.	Signal name	Logical bit	Logical port	Contents
0	IN20	16	2	Input
1	IN21	17		
2	IN22	18		
3	IN23	19		
4	IN24	20		
5	IN25	21		
6	IN26	22		
7	IN27	23		
N.C.	N.C.	-	-	Not connected
COM	COM	-	-	Plus / minus common for INPUT2

IN00 - 37	32 input signal pins. Connect output signals from the external device to these pins.
N.C.	This pin is left unconnected.
COM	Connect the positive or negative side of the external signal. These pins are common to 8 input signal pins.

Connecting Input Signals

Input Circuit


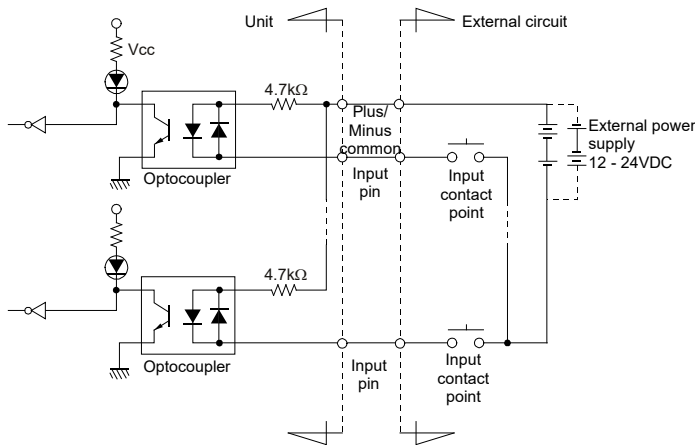


Figure above shows the input equivalent circuit for the interface section of this product.


The signal input section consists of an Optocoupler isolated input (compatible with both current sink output and current source output). An external power supply is therefore required to drive the input section of this unit. The power requirement is about 5 mA per input channel at 24 VDC (about 2.5 mA at 12 VDC).

Connecting a Switch

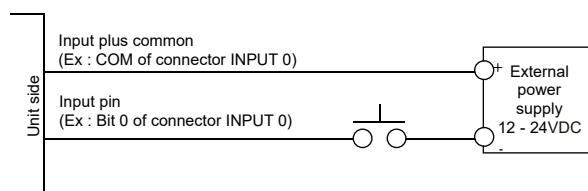


Examples of Connection to an External Device

Example of a Connection between Input and Current Sink Output

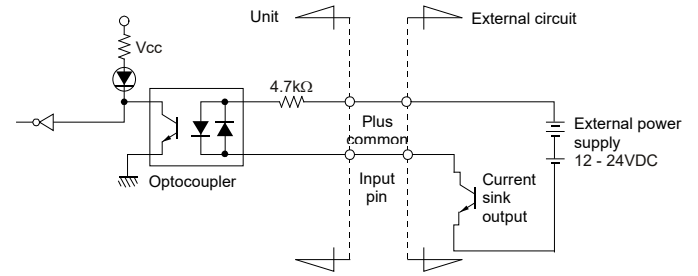


Example of a Connection between Input and Current Source Output

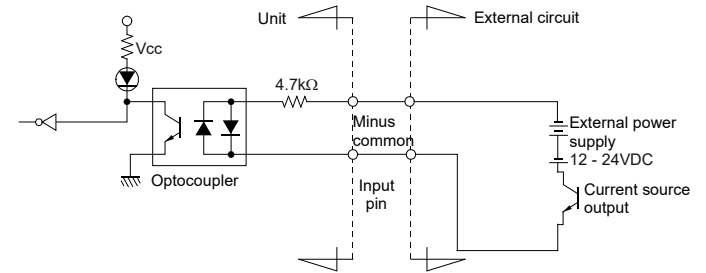


Example of a Connection between Input and Output Unit

Figure below shows the example of a connection between input pin of input unit and output pin of output unit.

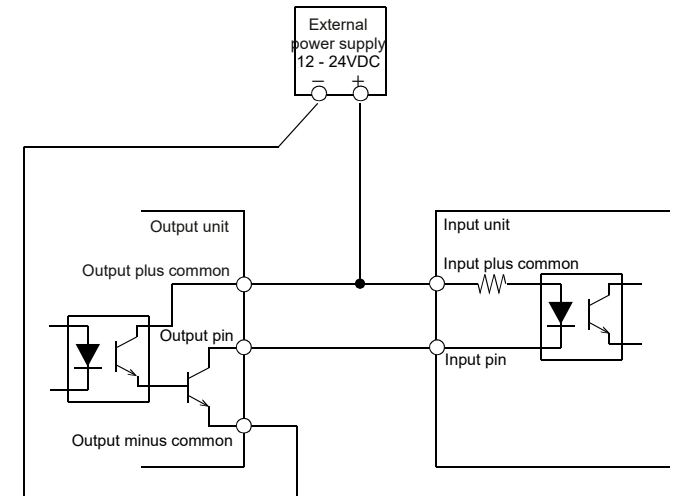


Installation Method

Mounting on a DIN Rail

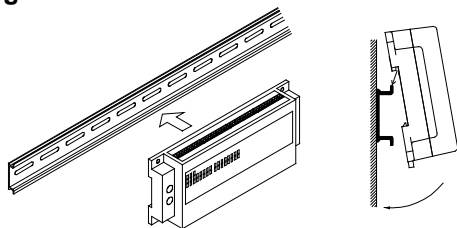


Desktop Installation

When required to mount the product on the desktop, mount it on a horizontal platform. The rubber feet can be mounted in their mounting holes as shown in the following figure.




Wall Installation

To mount the product on the wall, purchase the commercially available screw (fitting for $\phi 3.5$) separately.

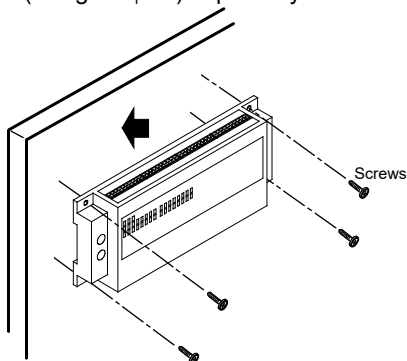


Installation Using the Magnet

Attaching the magnet supplied with the product makes it easy to mount or remove the product on or from a metal surface such as steel desk or partition.



Example of a Mounting on the partition



Installation Condition

Spacing between the system unit and any surrounding objects

Secure a distance of at least 50mm between the top of the main unit (single use) and any surrounding objects. Do not locate the unit in a fully enclosed housing. It is possible to mount it in the orientations shown in the following figure. Other orientations would cause problems in usage, such as inadequate heat dissipation.

