

## Digital I/O Board with Opto-Isolation for PCI Express (On-board Power Supply) DIO-1616B-PE



\* Specifications, color and design of the products are subject to change without notice.

### Features

#### Opto-coupler isolated input (supporting current sink output) and opto-coupler isolated open-collector output (current sink type)

DIO-1616B-PE has the 16ch of opto-coupler isolated input (supporting current sink output) and 16ch of opto-coupler isolated open-collector output (current sink type) whose response time is 200μsec. Common terminal provided per 16channels, capable of supporting a different external power supply. Supporting driver voltages of 12 - 24 VDC for I/O.

#### Opto-coupler bus isolation

As the PCI Express bus (PC) is isolated from the input and output interfaces by opto-couplers, this product has excellent noise performance.

#### Power for opto-coupler operation (12VDC 240mA) supplied internally

As the power to run the opto-couplers is supplied internally, no external power supply is required. The use of jumpers allows you to decide whether you want to use the internal or external power supply for every 16 points.

#### All input signals can be used as interrupt request signals

You can use all input signals as interrupt request signals and also disable or enable the interrupt in bit units and select the edge of the input signals, at which to generate an interrupt.

#### Windows/Linux support device driver

Using the device driver API-TOOL makes it possible to create applications of Windows/Linux. In addition, a diagnostic program by which the operations of hardware can be checked is provided.

#### Equipped with digital filter to prevent wrong recognition of input signals from carrying noise or a chattering

This product has a digital filter to prevent wrong recognition of input signals from carrying noise or a chattering. All input terminals can be added a digital filter, and the setting can be performed by software.

#### Zener diode for surge voltage protection and the circuit for overcurrent protection

Zener diodes are connected to the output circuits to protect against surge voltages. In addition, the output circuit, it attaches the overcurrent protection circuit at the output 8-channel unit. The output rating is max. 35VDC, 100mA per channel.

This product is a PCI Express bus-compliant interface board for input/output of digital signals. This product can input and output digital signals at 12 - 24VDC.

DIO-1616B-PE features 16 opto-coupler isolated inputs (supporting current sink output) and 16 opto-coupler isolated open-collector outputs (current sink type). You can use all of input signals as interrupt inputs. In addition, this product is equipped with a power supply for driving opto-couplers (12VDC), digital filtering, and output transistor protection circuits (surge voltage and overcurrent protection).

Windows/Linux device driver is supported with this product.

\*The contents in this document are subject to change without notice.

\*Visit the CONTEC website to check the latest details in the document.

\*The information in the data sheets is as of October 2024.

### Functions and connectors are compatible with PCI compatible board PIO-16/16B(PCI)H.

DIO-1616B-PE : The functions same with PCI compatible board PIO-16/16B(PCI)H are provided. In addition, as there is compatibility in terms of connector shape and pin assignments, it is easy to migrate from the existing system.

### Packing List

Product ...1

Please read the following ... 1

### Support Software

Name	Contents	How to get
Windows Version Digital I/O Driver software API-DIO(WDM)	The Windows device driver is provided as a form of Windows API functions. Various sample programs such as C# and Visual Basic .NET, Visual C++, Python etc. and diagnostic program useful for checking operation is provided.	Download from the CONTEC website *1
Linux Version Digital I/O Driver software API-DIO(LNX)	The Linux device driver is provided as a shared library. The software includes various sample programs such as gcc (C, C++) and Python programs, as well as a configuration tool to configure the device settings.	Download from the CONTEC website *1
Software Development Tool Kits (SDK) and Support Software	In addition to the device drivers, we offer many software programs for using CONTEC devices in an easier manner.	Download from the CONTEC website *2

\*1 Download the files from the following URL.

<https://www.contec.com/download/>

\*2 For supported software, search the CONTEC website for this product and view the product page.

<https://www.contec.com/>

## Hardware Specifications

### Function Specifications

Item	Specifications	
Input	Type	Opto-Isolated Input (for current sinking output) (Negative logic *1)
	Number of Channels	16ch (all available for interrupts) (One common power supply per 16 channels)
	Input resistance	4.7kΩ
	Current required to turn ON	2.0mA or more
	Current required to turn OFF	0.16mA or less
	Interrupts	Combine 16 interrupt signals to one interrupt request signal as the INTA. Either rising edge or falling edge of input signal can generate interrupt.
Output	Response time	200μsec within
	Type	Opto-Isolated Open Collector Output (current sinking type) (Negative logic *1)
	Number of Channels	16ch (One common power supply per 16 channels)
	Output rated voltage	35VDC (Max)
	Output rated current	100mA/channel (Max)
	Residual voltage with output on	0.5V or less (Output current ≤ 50mA), 1.0V or less (Output current ≤ 100mA)
	Surge protector	Zener diode RD47FM(Renesas) or equivalent
	Response time	200μsec within
Common	Internal power	12VDC 240mA *2
	Connecting distance	50m(Typ.)(depending on wiring environment)
	I/O address	Any 32-byte boundary
	Interruption level	1 level use
	Boards in one system	Maximum of 16 boards can be install in a same system.
	Isolated voltage	500Vrms
	External circuit power supply	12 - 24VDC(±10%)
	Power consumption	When using the internal power supply: 3.3VDC 350mA(Max), 12VDC 350mA(Max) When using the external power supply: 3.3VDC 350mA(Max)
	Bus specification	PCI Express Base Specification Rev. 1.0a x1
	Dimension (mm)	121.69(L) x 110.18(H) *3
	Weight	140g

\*1 Data "0" and "1" correspond to the High and Low levels, respectively.

\*2 When using the internal power supply, the input section consumes up to 40mA and the SW section of output channel consumes up to 30mA, so the output current that can be supplied to the external device is 170mA.


\*3 The size of board No.7382x is 169.33 (L) x 110.18 (H) mm

### Installation Environment Requirements

Item	Specifications
Operating ambient temperature	0 - +50°C
Operating ambient humidity	10 - 90%RH (No condensation)
Floating dust particles	Not to be excessive
Corrosive gases	None
Standard	VCCI Class A, CE Marking (EMC Directive Class A, RoHS Directive), UKCA, KC


## Physical Dimensions

### Board No.7342x



The standard outside dimension (L) is the distance from the end of the card to the outer surface of the slot cover.

### Board No.7382x

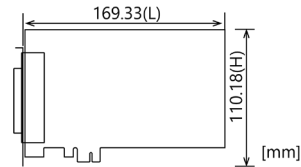

The standard outside dimension (L) is the distance from the end of the card to the outer surface of the slot cover.

## Optional Products


Product Name	Model type	Description
Shield Cable with two 37-pin D-type connectors	PCB37PS-0.5P	0.5m
	PCB37PS-1.5P	1.5m
	PCB37PS-3P	3m
	PCB37PS-5P	5m
Flat Cable with 37-Pin D-type Connectors on 2Ends	PCB37P-1.5	1.5m
Shield Cable with One 37pin D-type Connector	PCA37PS-0.5P	0.5m
	PCA37PS-1.5P	1.5m
	PCA37PS-3P	3m
	PCA37PS-5P	5m
Flat Cable with a 37Pin D-type Connectors	PCA37P-1.5	1.5m
	PCA37P-3	3m
Screw Terminal (M3 * 37P)	EPD-37A	*1 *2
Screw Terminal (M3.5 * 37)	EPD-37	*2
General Purpose Terminal	DTP-3C	*2
Screw Terminal	DTP-4C	*2
Signal monitor Accessory for Digital I/O (32bits)	CM-32L	*2

\*1 "Spring-up" type terminal is used to prevent terminal screws from falling off.

\*2 A PCB37P or PCB37PS optional cable is required separately.


Visit the CONTEC website for the latest optional products.

## Block Diagram

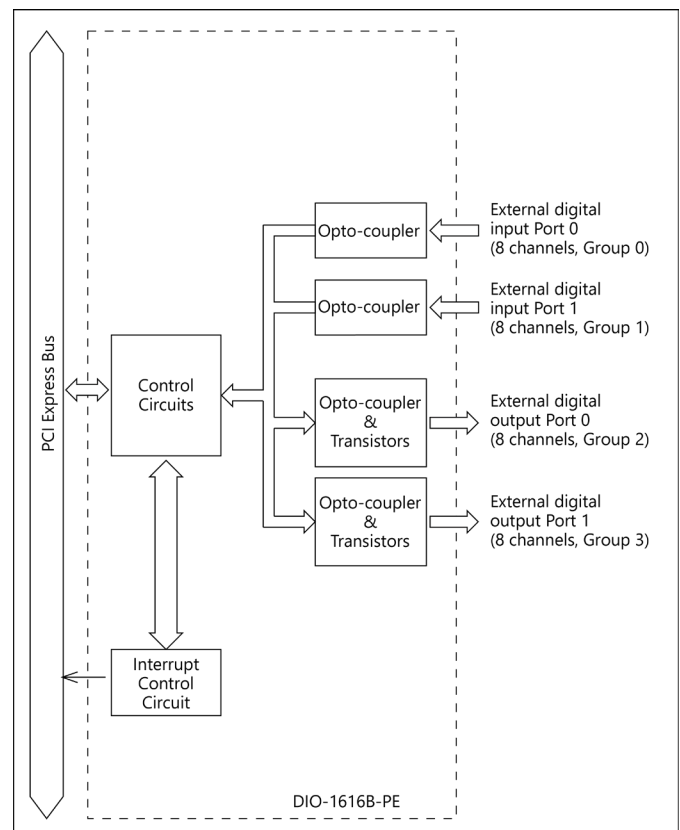

## Connecting an Interface Connector

To connect an external device to this product, plug the cable from the device into the interface connector (CN1) shown below.

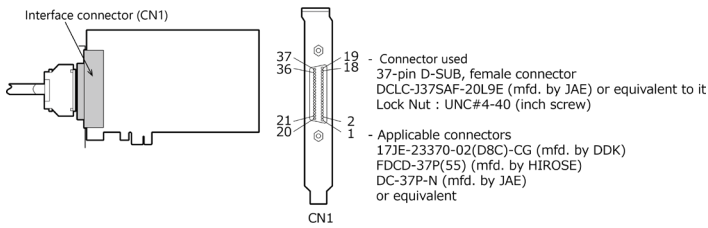

### Layout on the Interface Connector(CN1)

Common plus pin for +2/+3 output ports					Common plus pin for +0/+1 input ports		
+3 port (Output)	P1	37	19	N.C.	+1 port (Input)		
	O-37	36	18	P0			
	O-36	35	17	I-17			
	O-35	34	16	I-16			
	O-34	33	15	I-15			
	O-33	32	14	I-14			
	O-32	31	13	I-13			
	O-31	30	12	I-12			
+2 port (Output)	O-30	29	11	I-11	+0 port (Input)		
	O-27	28	10	I-10			
	O-26	27	9	I-09			
	O-25	26	8	I-08			
	O-24	25	7	I-07			
	O-23	24	6	I-06			
	O-22	23	5	I-05			
	O-21	22	4	I-04			
Common minus pin for +2/+3 output ports	N1	20	3	I-03	Common minus pin for +0/+1 input ports		
			2	I-02			
			1	I-01			
				I-00			

\* I-00 - I-17 can be used as interrupt signal.

Signal name	Description
I-00 - I-17	16 input signal pins. Connect output signals from the external device to these pins.
O-20 - O-37	16 output signal pins. Connect these pins to the input signal pins of the external device.
P0	When the external power supply is selected, its positive side is connected to this pin. When the internal power supply is used, this pin output power at +12 V. This pin is common to 16 input signal pins.
P1	When the external power supply is selected, its positive side is connected to this pin. When the internal power supply is used, this pin output power at +12 V. This pin is common to 16 output signal pins.
N0	When the external power supply is selected, its negative side is connected to this pin. When the internal power supply is selected, this pin serves as the ground. This pin is common to 16 input signal pins.
N1	When the external power supply is selected, its negative side is connected to this pin. When the internal power supply is selected, this pin serves as the ground. This pin is common to 16 output signal pins.
N.C.	This pin is left unconnected.

### CAUTION


To perform input/output using this product with the CONTEC device driver, specify logical ports and logical bits when calling each function. For details, refer to the "Relationships between API-TOOL Logical Ports/Bits and Connector Signal Pins" of Reference Manual.

## Connecting Input and Output Signal

### Input Circuit

Connect the input signals to a device which can be current-driven, such as a switch or transistor output device.

The product inputs the ON/OFF state of the current-driven device as a digital value.

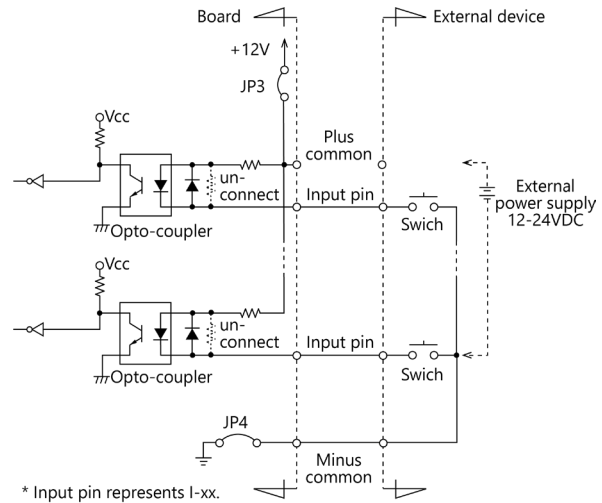

\* Input pin represents I-xx.


The input circuits of interface blocks of this product are illustrated in Figure. Connect the input signals to a device which can be current-driven, such as a switch or transistor output device.

This product inputs the ON/OFF state of the current-driven device as a digital value. The signal inputs are isolated by opto-couplers (ready to accept current sinking output signals). This product therefore requires the on-board internal power supply or the external power supply to drive the input section of this product. In this case, 5.1mA current is requested each channel on 24VDC (2.6mA on 12VDC).

### CAUTION

- Please refer to "Supply power setting jumper" of Reference Manual and then connect the jumper in accordance with the power supply to be used.


### Connecting a Switch (An Example to use Input I-00)

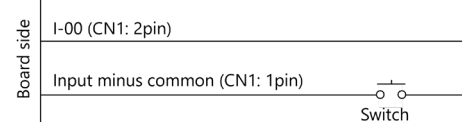

When the switch is ON, the corresponding bit contains 1.  
When the switch is OFF, by contrast, the bit contains 0.

## Output Circuit

Connect the output signals to a current-driven controlled device such as a relay or LED. The product controls turning on/off the current-driven controlled device using a digital value.

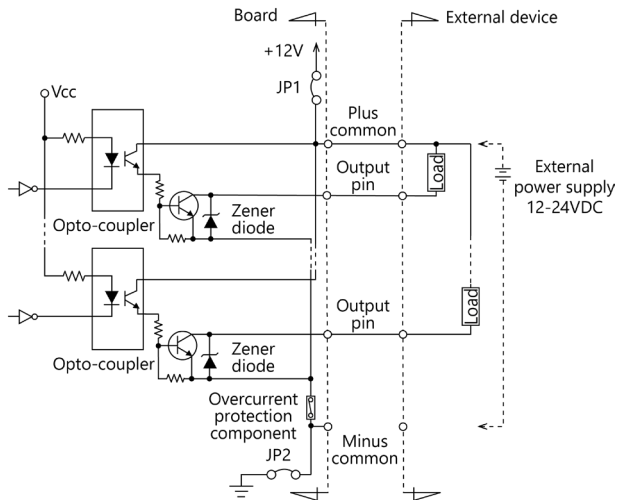

\* Output pin represents O-xx.

The signal output section is an opto-coupler isolated, open-collector output (current sink type).


This product therefore requires the on-board internal power supply or the external power supply to drive the output section of this product. The rated output current per channel is 100mA at maximum. The output section can also be connected to a TTL level input as it uses a low-saturated transistor for output. The residual voltage (low-level voltage) between the collector and emitter with the output on is 0.5V or less at an output current within 50mA or at most 1.0V at an output current within 100mA.

A zener diode is connected to the output transistor for protection from surge voltages. A overcurrent protection components is provided for every 8 output transistors.

### CAUTION


- When the PC is turned on, all output are reset to OFF.
- Please refer to "Selecting Power Supply" of Reference Manual and then connect the jumper in accordance with the power supply to be used.

## Connection to the LED (An Example to use Output O-20)

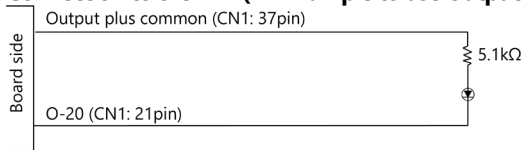


When "1" is output to a relevant bit, the corresponding LED comes on.  
When "0" is output to the bit, in contrast, the LED goes out.

## Example of Connection to TTL Level Input (Connection Example of Output and TTL level Input Signal)

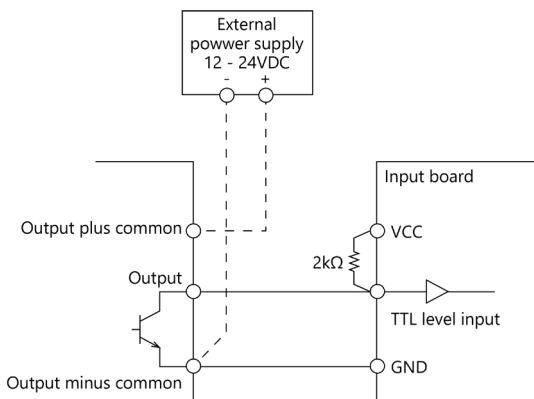


## Connecting the Sink Type Output and Sink Output Support Input

The following example shows a connection between a sink type output (output board) and a sink output support input (input board). Refer to this connection example when you connect such boards to each other.

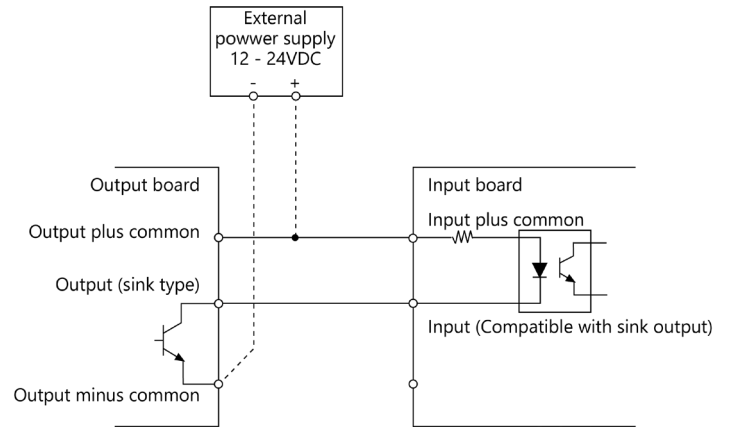


## Nomenclature of Product Components

### DIO-1616B-PE Board No.7342x

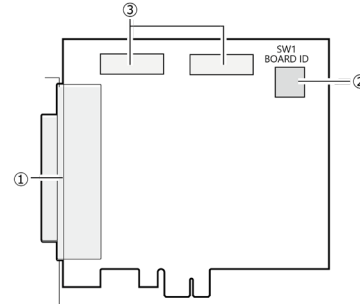

No.	Name	No.	Name
1	Interface Connector	3	Supply power setting jumper
2	Board ID Setting Switch		

### DIO-1616B-PE Board No.7382x

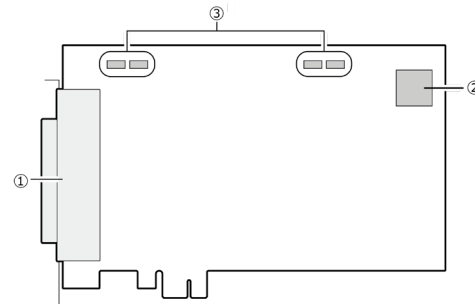

No.	Name	No.	Name
1	Interface Connector	3	Supply power setting jumper
2	Board ID Setting Switch		