

## Shield Cable for Analog I/O Card for CardBus



This product is a cable which converts 68-pin 0.8mm-pitch connector of the interface made of CONTEC card into 96-pin half-pitch connector.


\*The contents in this document are subject to change without notice.  
\*Visit the CONTEC website to check the latest details in the document.  
\*The information in the data sheets is as of December, 2023.

\* Specifications, color and design of the products are subject to change without notice.

## Specifications

Item	Specification
Connector used	68-pin 0.8mm-pitch connector: HDRA-E68MA1 [HONDA] or equivalent Thumb screw: M2
Cable	96-pin half-pitch, female connector PCR-E96FA[HONDA] or equivalent 68 core shield cable (34pair). Conductor size : AWG#30 Conductor composition : 7pcs/0.1mm UL20276
Weight	160g
Standard	CE(RoHS Directive), UKCA

## Physical Dimensions

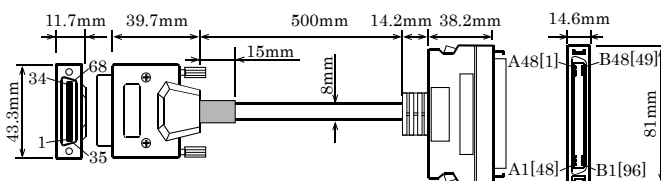

## Connection Diagram

