

Screw Terminal (M3 x 96)

EPD-96



* Specifications, color and design of the products are subject to change without notice.

Features

Up to 96 signal lines can be connected.

A signal line from an external device can be connected to the terminal simply by using screws.

The optional cable can be used to connect easily to the board/card.

Optimized configuration of board wiring.

Signal banks can be mounted on DIN rails.

The products is a general purpose terminal fastened with screws, which relays the I/O wirings of CONTEC interface board/card or card with a 96-pin half-pitch connector.

The pins in connector correspond to their respective terminals on the terminal strips on a one-to-one basis, allowing you to easily connect the board/card to an external device via the terminal strips.

Note: To connect a board/card to the accessory, you need the separately priced option cable.

Specification

Item	Specification
Rated isolated voltage	125VAC, 125VDC
Rated current	1A
Compatible wiring	2mm ² (Max.)
Isolated resistance	100MΩ or later
Voltage resistance	1000VAC, 60Hz, One minute
Compatible pins	Crimp-style pins, Max. diameter 7.2mm
Connector	PCR-E96MD+ (mfd. by HONDA) equivalent
Compatible rail	35mm (wide) DIN rail
Operating conditions	0 - 50°C, 10 - 90%RH (No condensation)
Weight	360g

Packing List


EPD-96 main unit...1

User's Guide...1


⚠ CAUTION

The option cable is not appended to the interface board/card and this product. Cable differs according to board/card used. Be sure to check the manual or visit the CONTEC's Web site to buy an appropriate one.

Physical View and Dimensions

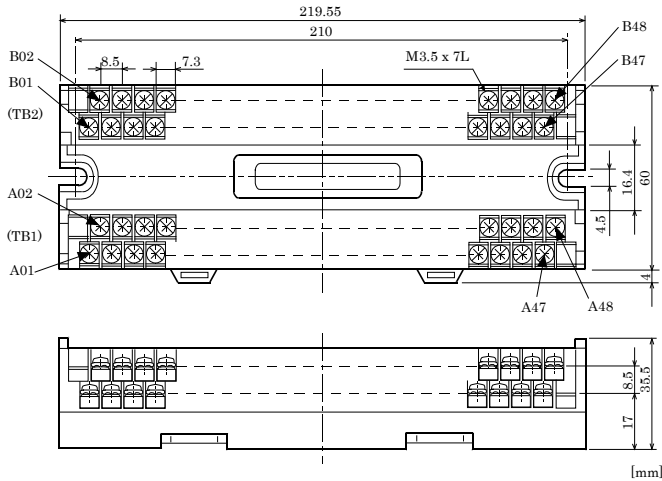

EPD-96 Connections

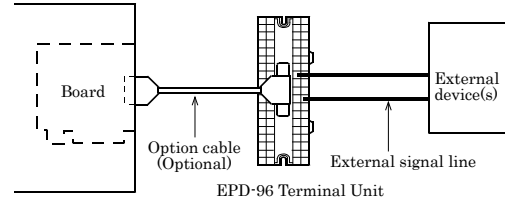

- (1) Connect the interface board/card and the terminal unit using the separately available option cable.
- (2) Identify the destination for connection on the terminal unit and connect the signal line from the external equipment. You can provide connection easily just by tightening the screws.

Wiring Diagram

Terminal TB1 No.	Connector Pin No.	Terminal TB2 No.
A01	48	B01
A02	47	B02
A03	46	B03
A04	45	B04
A05	44	B05
A06	43	B06
A07	42	B07
A08	41	B08
A09	40	B09
A10	39	B10
A11	38	B11
A12	37	B12
A13	36	B13
A14	35	B14
A15	34	B15
A16	33	B16
A17	32	B17
A18	31	B18
A19	30	B19
A20	29	B20
A21	28	B21
A22	27	B22
A23	26	B23
A24	25	B24
A25	24	B25
A26	23	B26
A27	22	B27
A28	21	B28
A29	20	B29
A30	19	B30
A31	18	B31
A32	17	B32
A33	16	B33
A34	15	B34
A35	14	B35
A36	13	B36
A37	12	B37
A38	11	B38
A39	10	B39
A40	9	B40
A41	8	B41
A42	7	B42
A43	6	B43
A44	5	B44
A45	4	B45
A46	3	B46
A47	2	B47
A48	1	B48