


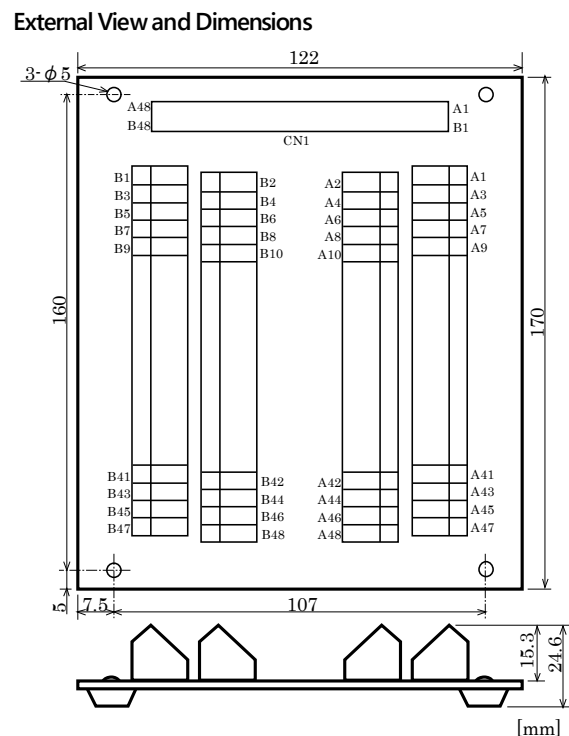


Item	Specifications
Terminal	
Terminal type	SMKDSP1.5/24-5.08 [mfd. by PHOENIX CONTACT] equivalent
Number of terminals on terminal strips	96 pin
Stripped length (mm)	6
Screws	M3
Connectable wire (mm ²)	Maximum connection range : 0.13 - 1.5 Single wires : 0.5 - 1.5 Stranded wires : 0.5 - 1.5
Acceptable voltage	60V
Acceptable current	1A
Connector	
Connector used	PCR-E96MD+ [mfd. by HONDA TSUSHIN KOGYO Co., LTD] equivalent
Applicable connector	PCR-E96FA [mfd. by HONDA TSUSHIN KOGYO Co., LTD] equivalent
Dimensions (mm)	170(W) x 122(H)

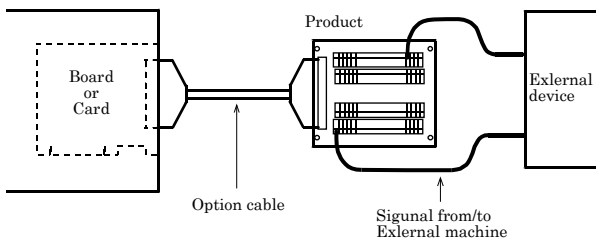

Wiring Diagram

96pin Conector

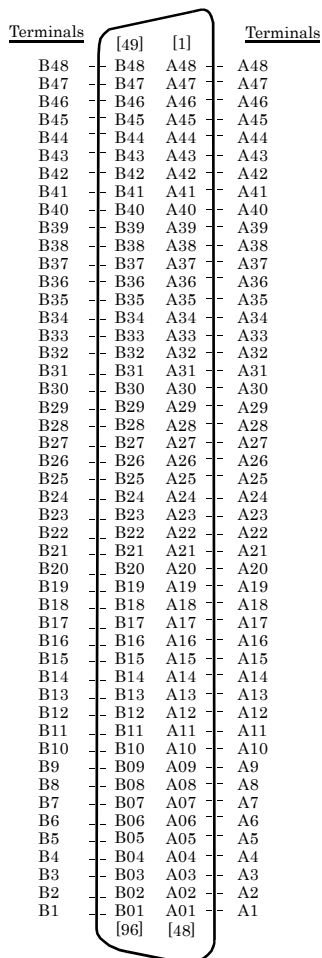

The numbers in square brackets [] are
pin numbers designated by
HONDA TSUSHIN KOGYO CO., LTD.

Difference point with DTP-64(PC)

This product is a successor of the previous model DTP-64(PC).
So you can use the same operating procedures as DTP-64(PC).

The differences on the specification are as follows :

	DTP-64A	DTP-64(PC)
Terminal type	SMKDS1.5/24-508 [mfd. by PHOENIX CONTACT] equivalent	MK8/4 [mfd. by NIHON WEIDMULLER] equivalent
Screws	M3	M2.5
Terminal color	Green	Orange
Height of rubber foot	7.2mm	5.0mm