


High Speed & Function IEEE-488.2 I/F Board  
for Low Profile PCI

### GP-IB(LPCI)F

High Speed IEEE-488.2 I/F Board  
for Low Profile PCI

### GP-IB(LPCI)FL

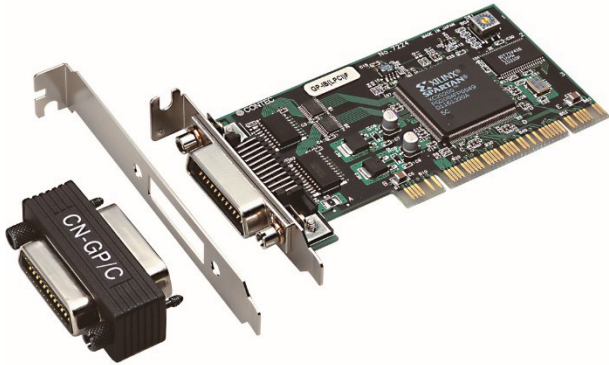

\* Specifications, color and design of the products are subject to change without notice.

## Features

- Capable to communicate with GPIB communication which is compatible to IEEE-488.1/488.2 standards at 1.5 M byte/sec maximum

Capable to communicate with any equipment which is compatible to IEEE-488.1/488.2 standards with transfer rate at 1.5 Mbyte/sec maximum. Capable to set this product to whether a master (controller) or a slave.

- Supports bus master operation

The bus master data transfer function enables large quantities of data to be transferred between the board and PC without loading the CPU.

- Internal 2Kbyte FIFO buffers for send and receive

The board has separate 2Kbyte FIFO buffers for sending and receiving data, allowing both small and large volumes of data to be transferred at high speed. Interface messages also use a FIFO to enable high-speed transmission.

- Windows/LabVIEW compatible support software is offered

The support software offered on the CONTEC website makes it possible to create applications of Windows/LabVIEW. In addition, supplies a diagnostic program to confirm hardware operation and to perform a basic communication test with connected equipment.

- Employs a high speed GPIB controller developed by CONTEC and provides steady-supply

This product employs CONTEC's self-developed high speed GPIB controller ( $\mu$ PD7210 register-compatible), which provides users steady-supply with peace of mind.

- Built-in GPIB bus analyzer function [only GP-IB(LPCI)F]

The board features a bus analyzer function. This not only allows the signals on the GPIB bus to be analyzed, but also permits signal analysis to be performed while this product is performing GPIB communications.

- Built-in SPAS event function (when slaving)

In addition to the functions of the earlier GPIB controller ( $\mu$ PD7210), the product also supports the SPAS event generated when a serial poll occurs. This gives users a high level of flexibility in constructing the system.

- Support for both of Low Profile and standard size slots

Support for both of Low Profile and standard size slots (interchangeable with a bundled bracket).

This product is a PCI Express bus-compatible interface board with support for bus master operation and which complies with IEEE-488.1 and IEEE-488.2. This product can be used in a PC to control communications with devices that support the GPIB interface and read GPIB bus line data.

The GP-IB(LPCI)F can also analyze the signal on the GPIB bus using the built-in memory (GPIB bus analyzer function).

The GP-IB(LPCI)F, GP-IB(LPCI)FL supports a low-profile size slot and, if replaced with the supplied bracket, supports a standard size slot, too.

Windows/LabVIEW device driver is supported with this product.

Model	Bus analyzer function
GP-IB(LPCI)F	○
GP-IB(LPCI)FL	None

- \* The contents in this document are subject to change without notice.
- \* Visit the CONTEC website to check the latest details in the document.
- \* The information in the data sheets is as of July, 2024

## Specifications

### Function specification

Item		GP-IB(LPCI)F	GP-IB(LPCI)FL
GPIB	The number of channels	1 channel Conforms to IEEE-488.1, 488.2(GPIB)standards	
	Transfer format	8-bit parallel, 3-wire handshake system	
	Transfer rate	1.5Mbyte/sec	
	Data buffer size	2Kbyte send, 2Kbyte receive	
	Signal logic	Negative logic L level : 0.8V or less, H level : 2.0V or more	
	Cable length between devices	4m or less *1	
	Total cable length	20m or less	
	Connectable number of devices	15 devices (Max.)	
	Analyzer buffer size	64K data points (1 data point : Control signals + DIO1 - 8)	-
Bus master section	DMA channels	2 channels	
	Transfer bus width	32-bit	
	Transfer data length	8 PCI Words length (Max.)	
	Transfer rate	80Mbyte/sec	
	Scatter/Gather function	64Mbyte/ch	
Common	I/O address	Any 128-byte boundary	
	Interrupt	1 level use	
	Consumed current	5VDC 400mA (Max.)	
	PCI bus specification	32-bit, 33MHz, Universal key shapes supported *2	
	Physical dimensions (mm)	121.69(L) x 63.41(H)	
	Weight	110g	


\*1 For details, see "Notes on GPIB cable connection".

\*2 This board requires power supply at +5 V from an expansion slot (it does not work on a machine with a +3.3 V power supply alone).

### Installation Environment Requirements

Item	Specification
Operating ambient temperature	0 - 50°C
Operating ambient humidity	10 - 90%RH (No condensation)
Floating dust particles	Not to be excessive
Corrosive gases	None
Standard	VCCI Class A, CE Marking (EMC Directive Class A, RoHS Directive), UKCA

## Physical Dimensions

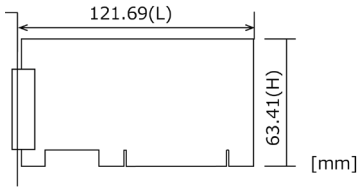

The standard outside dimension (L) is the distance from the end of the card to the outer surface of the slot cover.

## Support Software

Name	Contents	How to get
Windows version GPIB Communication Driver API-GPB(98/PC)	It is the driver software, and which supplies command in the form of standard Win32 API function (DLL). In addition, sample programs such as Visual Basic and Visual C++ are included, and you can verify the operation of hardware by using Diagnostic programs.	Download from the CONTEC website
Windows version LabVIEW GPIB Communication Drive API-GLV(W32)	API-GLV(W32) is a driver created according to the National Instruments Corporation's GPIB function style. The driver is software to control the CONTEC GPIB board using a LabVIEW-based GPIB system or existing application program.	Download from the CONTEC website

Download the files accordingly from the following URL.

<https://www.contec.com/download/>

## Optional Products

Product Name	Model type	Description
GPIB cable	PCN-T02	2m
	PCN-T04	4m
GPIB connector adapter	CN-GP/C *1	*2

\*1 The GPIB connector adapter [CN-GP/C] is bundled with this product as a standard feature.

\*2 Effective if this product interferes with the main unit of the target device when plugging this product into the device.

Visit the CONTEC website for the latest optional products.

## Included Items


Product...1

Please read the following...1

GPIB connector adapter [CN-GP/C]...1


Standard-sized bracket...1

## Nomenclature of Product Components

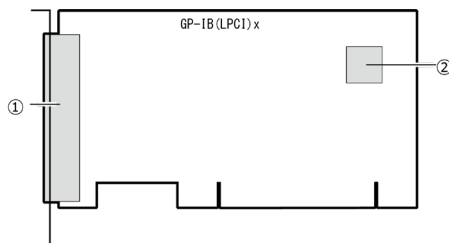


No.	Name
1	Interface Connector
2	Board ID Setting Switch

## Connecting an Interface Connector

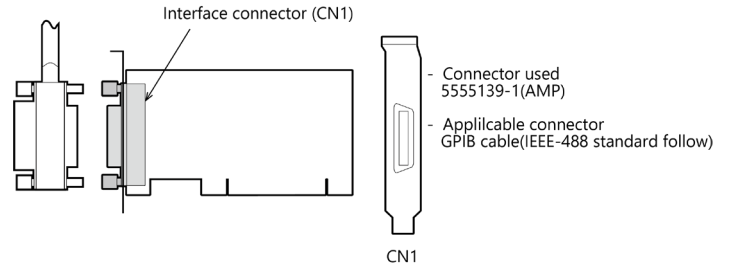

### Layout on the Interface Connector(CN1)



Compatible connector (cable): GPIB cable (IEEE-488 standard follow)

Pin number	Signal name	Pin number	Signal name
1	DIO1 Data bus	13	DIO5 Data bus
2	DIO2 Data bus	14	DIO6 Data bus
3	DIO3 Data bus	15	DIO7 Data bus
4	DIO4 Data bus	16	DIO8 Data bus
5	EOI (End or Identify)	17	REN (Remote Enable)
6	DAV (Data Valid)	18	GND (Grand)
7	NRFD (Not Ready for Data)	19	GND (Grand)
8	NDAC (Not Data Accepted)	20	GND (Grand)
9	IFC (Interface Clear)	21	GND (Grand)
10	SRQ (Service Request)	22	GND (Grand)
11	ATN (Attention)	23	GND (Grand)
12	GND (Shield)	24	Logic GND