

Shielded Cable With Two 68pin Connector PCB68PS-**P



* Specifications, color and design of the products are subject to change without notice.

This products are cables for connecting a 68-pin 0.8mm-pitch connector on CONTEC board with 68-pin 0.8mm-pitch connector.

*The contents in this document are subject to change without notice.

*Visit the CONTEC website to check the latest details in the document

*The information in the data sheets is as of December, 2023.


Model

Model	Cable
PCB68PS-0.5P	0.5m
PCB68PS-1.5P	1.5m
PCB68PS-3P	3m
PCB68PS-5P	5m

Specifications

Item	Specification
Connector used	68-pin 0.8mm-pitch connector HDRA-E68MA1 (HONDA) or equivalent x 2 Thumb screw: M2
Cable	68 core shield cable (34pair). Conductor size: AWG#30 Conductor composition: 7pcs/0.1mm UL20276
Weight	160g(PCB68PS-0.5P), 280g(PCB68PS-1.5P), 460g(PCB68PS-3P), 700g(PCB68PS-5P)
Standard	CE(RoHS Directive), UKCA

Specification

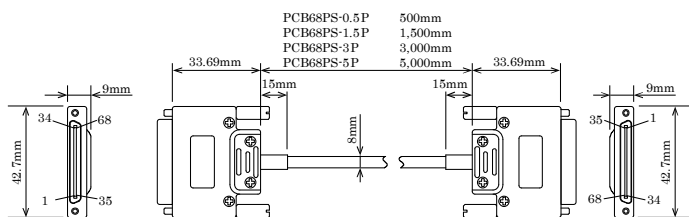

Connection Diagram

