

## 50 pin miniature ribbon --> 37 pin D-SUB conversion shield cables (Mold type, 0.5m) PCE50/37PS-0.5P



\* Specifications, color and design of the products are subject to change without notice.

This cable is a cable which converts 50-pin mini-ribbon connector of the interface made of CONTEC board into 37-pin D-SUB female connector.

\*The contents in this document are subject to change without notice.


\*Visit the CONTEC website to check the latest details.

\*The information in the data sheets is as of July, 2022.


### Specifications

Item	Specification
Connector used	50-pin mini-ribbon connector: 0150-6000EL[3M] or equivalent
	37-pin D-SUB, male connector: 17JE-13370-02[D1][DDK] or equivalent Connector fittings: 17L-002C[DDK] or equivalent      Thumb screw: UNC#4-40 (Inch screw)
Cable	50 core shield cable(25pair). Conductor size : AWG#28 Conductor composition : 7pcs/0.127mm UL20276 *1
Weight	220g
Standard	RoHS Directive, UKCA

\*1: This specification is UL2464, when the "R2" is not printed on the Revision No.



### Physical Dimensions

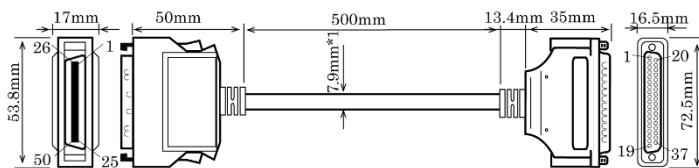

\*1: This specification is 11mm, when the "R2" is not printed on the Revision No.

#### ▼CAUTION

When removing the 50-pin mini-ribbon connector, push the connector back to the card side once.  
While pressing the latch release button, pull it straight out.

### Connection Diagram

