

Connection Cable of COM-4ch for CCU-78F/25M(2m)

RSS-78M/37M




This product is a cable for connecting a 37-pin D-SUB connector on the RS-232C board with a 78-pin D-SUB connector on the distribution unit (CCU-78F/25M).

* Specifications, color and design of the products are subject to change without notice.

Specifications

Item	Specification
Connector	37-pin D-SUB male connector Lock screws : UNC#4-40 (Inch screw threads)
	78-pin D-SUB male connector Lock screws : UNC#4-40 (Inch screw threads)
Cable	37 core shield cable Conductor size: AWG28 Conductor composition: 7pcs/0.127mm UL2725
Weight	400g

Physical Dimensions

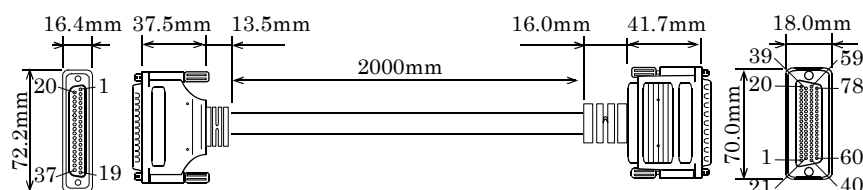

Connection Diagram

