


16チャンネル増設用アクセサリ

ATCH-16(PC)

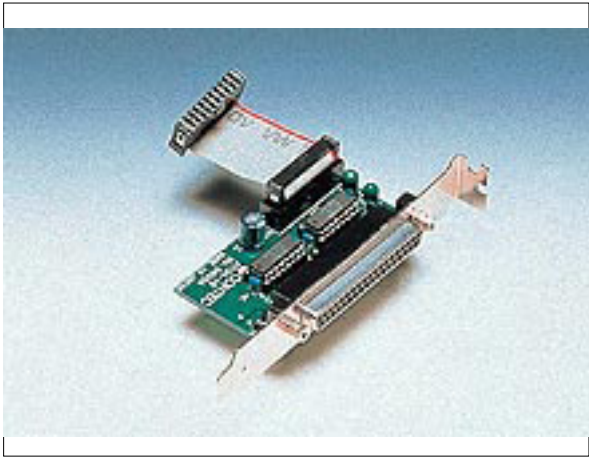


このアクセサリは、AD12-16(PC)E、AD12-16(PC)EH、AD16-16(PC)EおよびAD16-16(PC)EHに接続し、アナログ入力チャンネルをシングルエンド入力で16チャンネル、差動入力で8チャンネル増設するためのサブボードです。

仕 様

入力点数	シングルエンド入力時 16チャンネル 差動入力時 8チャンネル
入力仕様	非絶縁入力 $\pm 10V$
消費電流	DC+5V, 10mA Max.
外形寸法(mm)	75.0(L) $\times$ 40.0(H)
対応ボード	AD12-16(PC)E AD16-16(PC)E AD12-16(PC)EH AD16-16(PC)EH
CN1使用コネクタ	37ピンD-Sub [F(雌)タイプ]
CN1適合コネクタ例	17JE-23370-02(D8C) [DDK製]

外観図

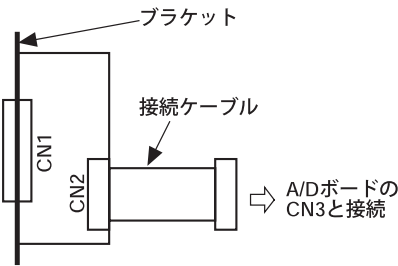

商品構成

- ATCH-16(PC) (ブラケット・接続ケーブル付き)...1
- 解説書...1

インターフェイスコネクタ

Description		No.	
Analog Input 16 / 8[+]	1	1	
Analog Input 24 / 8[-]	2	2	
Analog Input 17 / 9[+]	3	3	
Analog Input 25 / 9[-]	4	4	
Analog Input 18 / 10[+]	5	5	
Analog Input 26 / 10[-]	6	6	
Analog Input 19 / 11[+]	7	7	
Analog Input 27 / 11[-]	8	8	
Analog Input 20 / 12[+]	9	9	
Analog Input 28 / 12[-]	10	10	
Analog Input 21 / 13[+]	11	11	
Analog Input 29 / 13[-]	12	12	
Analog Input 22 / 14[+]	13	13	
Analog Input 30 / 14[-]	14	14	
Analog Input 23 / 15[+]	15	15	
Analog Input 31 / 15[-]	16	16	
Analog Output	17	17	
Simultaneous Hold Output	18	18	
+5V DC from PC	19	19	

CN1

No.	Description
20	Analog Ground
21	Analog Ground
22	Analog Ground
23	Analog Ground
24	Analog Ground
25	Analog Ground
26	Analog Ground
27	Analog Ground
28	Analog Ground
29	Analog Ground
30	Analog Ground
31	Analog Ground
32	Analog Ground
33	Analog Ground
34	Analog Ground
35	Analog Ground
36	Analog Ground
37	Digital Ground

注) ピン番号17, 18, 19, 37の信号は、接続するA/Dボード本体と同一の信号です。